



# ART. 8520.100

## Hose reels - s. 530

Swivelling hose reel, s.520, for air-water, 20 bar, without hose. Inlet G 1/2" (f)



### FLUIDS

FRESH OIL | ANTIFREEZE | AIR | WATER | NITROGEN/INFLATING USE

### SECTORS

AERONAUTIC | AGRICULTURE | AUTOMOTIVE | LUBE TRUCK AND INDUSTRIAL VEHICLE | BUILDING INDUSTRY AND ROAD CONSTRUCTION | RAILWAY TRANSPORT | MANUFACTURING INDUSTRY  
FRESH OIL | ANTIFREEZE | AIR | WATER | NITROGEN/INFLATING USE

### CERTIFICATIONS

ATEX (ZONE 2) | ATEX (ZONE 22)

| Features            | UM    | Value                     |
|---------------------|-------|---------------------------|
| Pressure            | bar   | 20                        |
| Compatible fluids   |       | air - water               |
| Swivel joint        |       | brass                     |
| Seals               |       | Viton®                    |
| Characteristic      |       | swivelling                |
| Material            |       | painted steel             |
| Couplings           |       | -                         |
| Hose                |       | -                         |
| Ø and hose length   | Ø - m | -                         |
| Inlet               |       | G 1/2" (f)                |
| Outlet              |       | G 1/2" (f)                |
| Reel flow path      |       | brass - zinc plated steel |
| Internal drum width | mm    | 104                       |

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135


info@raasm.com - www.raasm.com

Copyright © 2019 All rights reserved to RAASM S.p.A.



Overall dimensions

---

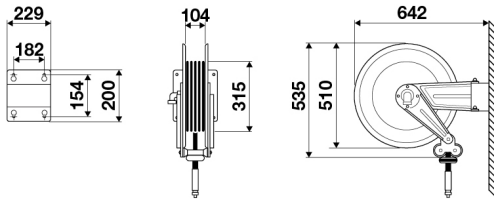

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2019 All rights reserved to RAASM S.p.A.