



ART. 8554.350

AISI 304 and 316 stainless steel hose reels

Swivelling hose reel in stainless steel AISI 304, s.540, for hot water, 400 bar, without hose. Inlet G 3/8" (f), outlet G 1/2" (f)



FLUIDS

ANTIFREEZE | WINDSHIELD FLUID | WATER | ADBLUE® | CLEANING DETERGENT

SECTORS

AGRICULTURE | CLEANING | BUILDING INDUSTRY AND ROAD CONSTRUCTION | RAILWAY TRANSPORT | CHEMICAL INDUSTRY | MANUFACTURING INDUSTRY | MINING | SHIPPING AND OFFSHORE
ANTIFREEZE | WINDSHIELD FLUID | WATER | ADBLUE® | CLEANING DETERGENT

CERTIFICATIONS

ATEX (ZONE 1) | ATEX (ZONE 21)

Features	UM	Value
Pressure	bar	400
Compatible fluids		water max 130 °C
Swivel joint		AISI 304 stainless steel
Seals		Teflon®
Characteristic		swivelling
Material		AISI 304 stainless steel
Couplings		-
Hose		-
Ø and hose length	Ø - m	-
Inlet		G 3/8" (f)
Outlet		G 1/2" (f)
Reel flow path		AISI 304 stainless steel
Internal drum width	mm	165

RAASM SpA


via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2019 All rights reserved to RAASM S.p.A.



Overall dimensions

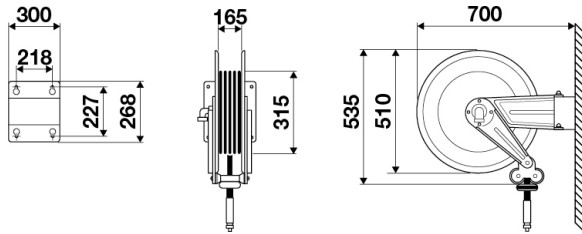

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2019 All rights reserved to RAASM S.p.A.