



# ART. 93108.106

## Enclosed hose reels with polyurethane hose

Enclosed hose reel with swivelling support s.300 for air-water 20 bar with hose 15 m  $\varnothing$  10x14,5 mm



### FLUIDS

ANTIFREEZE | AIR | WATER | NITROGEN/INFLATING USE

### SECTORS

AERONAUTIC | AGRICULTURE | AUTOMOTIVE | LUBE TRUCK AND INDUSTRIAL VEHICLE | CLEANING | BUILDING  
INDUSTRY AND ROAD CONSTRUCTION | CHEMICAL INDUSTRY | MANUFACTURING INDUSTRY  
ANTIFREEZE | AIR | WATER | NITROGEN/INFLATING USE

Features	UM	Value
Pressure	bar	20
Compatible fluids		air - water 40°C
Swivel joint		brass, swivelling hose outlet
Seals		Viton®
Characteristic		swivelling
Material		painted steel
Couplings		brass
Hose		972.116
$\varnothing$ and hose length	$\varnothing$ - m	3/8" - 15
Inlet		G 3/8" (m)
Outlet		G 3/8" (m)
Reel flow path		brass - Delrin®
Internal drum width	mm	124

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135


info@raasm.com - www.raasm.com

Copyright © 2019 All rights reserved to RAASM S.p.A.



Overall dimensions

---

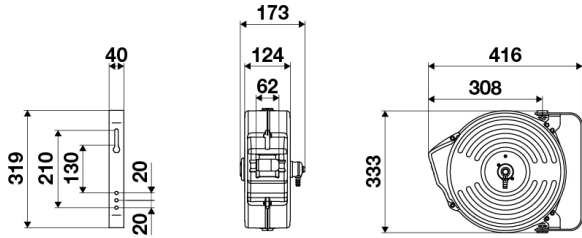

RAASM SpA

via Marangoni 33, 36022 - S. Zeno di Cassola (VI) - ITALIA  
Tel. 0039 0424 571111 - Fax. 0039 0424 571135

info@raasm.com - www.raasm.com

Copyright © 2019 All rights reserved to RAASM S.p.A.